



OPERATOR'S MANUAL

HARD TIMES



copyright 1994





Playmark

P C B CONECTOR JAMMA


SOLDER SIDE	PIN	NO.	COMPONENTS SIDE
GND	A	1	GND
GND	B	2	GND
+5V	C	3	+5V
+5V	D	4	+5V
	E	5	
+12V	F	6	+12V
	H	7	
COIN COUNTER 2	J	8	COIN COUNTER 1
COIN LOCKOUT 2	K	9	COIN LOCKOUT 1
SPEAKER (-)	L	10	SPEAKER (+)
	M	11	
GREEN	N	12	RED
SYNC	P	13	BLUE
SERVICE	R	14	VIDEO GND
	S	15	
COIN IN 2	T	16	COIN IN 1
2P START	U	17	1P START
2P UP	V	18	1P UP
2P DOWN	W	19	1P DOWN
2P LEFT	X	20	1P LEFT
2P RIGHT	Y	21	1P RIGHT
2P SHOOT	Z	22	1P SHOOT
2P ROLL	a	23	1P ROLL
2P BOMB	b	24	1P BOMB
	c	25	
	d	26	
GND	e	27	GND
GND	f	28	GND

CONTROL PANEL

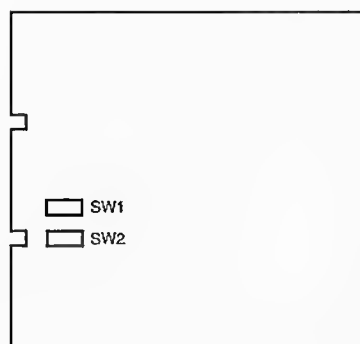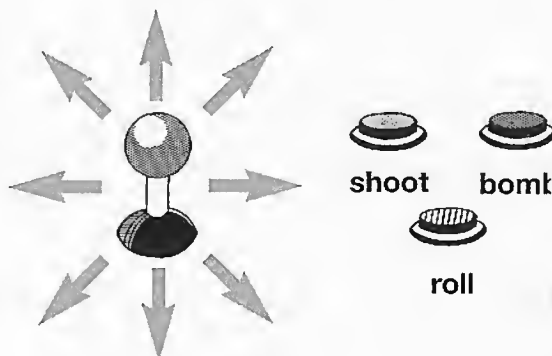

[illegible]

ITEM	DESCRIPTION	DIP SWITCH 2							
		1	2	3	4	5	6	7	8
NUMBER OF LIVES	3 2 5 1	OFF ON OFF ON	OFF OFF ON ON						
EXTENDED PLAY	300K, 500K EVERY 500K, 500K EVERY 500K ONLY NO EXTEND PLAY			OFF ON OFF ON	OFF OFF ON ON				
DIFFICULTY	NORMAL EASY HARD VERY HARD					OFF ON OFF ON	OFF OFF ON ON		
CONTINUE PLAY	YES NO							OFF ON	
DEMO SOUND	NO YES								OFF ON



Playmark

playmark srl.
20159 milano via g. murat 28 telefoni 02-66803664 fax 02-66803684